

PARAPROJECT®

Case TC10 Plus

Protect , TwinCharge , Transport



Part denomination	PARAPROJECT Case TC10 Plus TwinCharge, USB-C®, without cable, black
Part number	20871015101
GTIN /EAN	4006793003019
Field of application	Education
Certificates	CE
Applicable standards	NRL 2011/65/EU / DIN EN 62368-1:2016-05. EMV 2014/35/EU / DIN EN 55022:210+AC:2011 / DIN EN 55024:2010. Rohs 2011/65/EU / DIN EN 50
Scope of delivery	- 1x Case TC10 Plus, with integrated TwinCharge technology - 1x device connecting cable, EU, length: 5m - 1x operating instruction for case and combination lock
Materials	- X-ABS plastic
External dimensions (WxDxH)	530 mm x 360 mm x 450 mm
Weight	11500 g
Transport dimensions	1530 mm x 370 mm x 500 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1065 mm
Number of euro-pallet	12
customs tariff number	85044083
Country of origin	RO
Fittings	- case lid with nap foam inlay to stabilize devices - 2x storage compartments for accessories such as styluses and small parts - TwinCharge charging unit with USB-C and A ports , 10x storage compartments for tablets - electric tower with on/off switch and socket for Access Point (or Apple TV, Chromecast) - active fans (2x axial fans) in the case bottom for optimal air circulation - temperature sensor, overvoltage protection - on/off switch for complete case - RJ 45 interface for Access Point (ir Apple TV, Chromecast)
Compatible devices	all tablets up to 11.5" ; chargeable via USB (USB A and USB-C , QuickCharge, PD)
Max. number of devices	10
Operating system	iOS / Android / Windows
Optional accessories	- USB charging cable for USB-C to C, USB-C to Lightning, USB-A to Lightning - USB data and charging cable with LED display for USB-C to Lightning , USB-A to Lightning - external week timer
Lock types	combination lock
Connections	- - outside: central power supply with protective cap, RJ 45 interface, central rocker switch - inside: 10 x USB-A sockets each or USB-C socket, optional depending on cable types available

PARAPROJECT®

Case TC10 Plus


Protect , TwinCharge , Transport

Data of currents	- 100 - 240 V - max. 5.0 A - 50/60 Hz
Dimension of pockets	22 x 200 x 280 mm
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm



- - main switch
- - network port

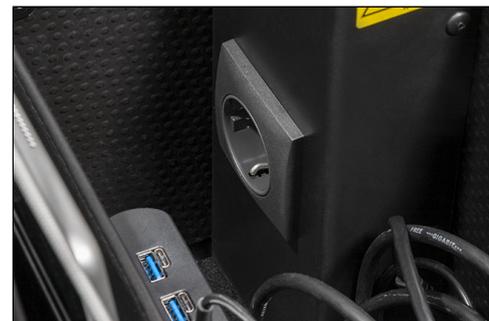

- electric tower with additional Schuko outlet for e.g. Access point
- slots for up to 10 tablets