


PARAPROJECT®

Case i15 BASKET

charging , synchronisation , transportation , protection

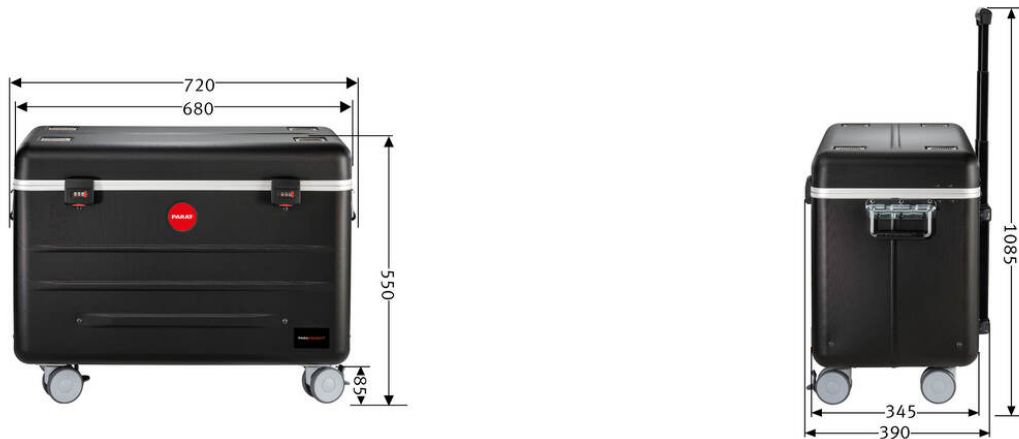

Part denomination	PARAPROJECT Case i15 BASKET Charge&Sync, incl. USB Lightning® cable, black
Part number	208.650-15101
GTIN /EAN	4006793002654
Field of application	Education , Health Care
Certificates	CE
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55024
Scope of delivery	<ul style="list-style-type: none"> - 15x USB data and charging cables on lightning connector with LED display - 1x Device connection cable, EU, length: 5 m - 1x USB connection cable length: 3 m - 1x internal week timer - 1x Y-adapter with 1x IBM socket (C5, 3-pole and 1x Euro 8 socket (C7, 2-pole) - 1x Y-adapter with 1x Euro flat socket (2-pole) and 1x Euro 8 socket (C7, 2-pole) - 1x Operating instructions for combination lock - 1x User guide - 3 Basket inserts (red, green, blue)
Materials	<ul style="list-style-type: none"> - X-ABS plastic - aluminium
Transport	4x smooth-running wheels (2 of which with wheel locking devices) / Telescopic slide-out, 4x / carrying handles on both sides
External dimensions (WxDxH)	720 mm x 390 mm x 550 mm
Weight	15200 g
Transport dimensions	760 mm x 420 mm x 570 mm
Dimensions of euro-palettes	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO
Fittings	<ul style="list-style-type: none"> - Case cover with various compartments and pockets - Body with syncing and charging unit - Storage space for 3 removable baskets (3 baskets in the colours red, blue, green) - Storage compartment for master laptop - Additional ventilation openings in the cover and base section for optimum air circulation - 15x lightning cables with LED status display
Compatible devices	All iPads from Generation 4, as well as all iPad Minis
Max. number of devices	15
Operating system	iOS
Power supply	USB data and charging cable on lightning connector with LED display
Output power per port	5V/up to 2,4A/up to 12w


PARAPROJECT®

Case i15 BASKET

charging , synchronisation , transportation , protection

Lock types	combination lock
Connections	- External: - Central power supply with protective cap - USB-B socket for the sync function - Network socket (RJ45) for Access Point - Optional HDMI socket Internal: - 16x USB-A socket for Flex2Connect - Y-adapter, C14 plug on 1 x IBM socket (C5, 3-pole) and 1 x Euro 8 socket (C7, 2-pole, AUX 1) - Y-Adapter, C14 plug on 1 x Euro flat socket and 1 x Euro 8 socket (C7, 2-pole, AUX 2)
Data of currents	- 100 - 240 V - max. 3,6 A - 50/60 Hz
Dimension of pockets	530 x 240 x 320 mm / max Tabletgröße 300 x 220 mm
Dimensions of other pockets	305 x 240 x 320 mm
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm

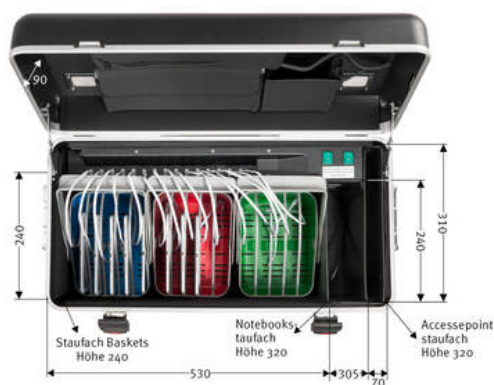

- central power supply with protective cap
- USB-B terminal for sync
- network connector (RJ45) for access point
- optional HDMI port



- 3 removable baskets for easy handling