

Chiosco Stand



1

Place floor bumpers underneath the foot plate

2

Mount the 2 side panels to the foot plate, use 4x countersunk M6. Working together with someone, might make this step easier.

3

Fit the footplate against the straight side of the tube and display and mount with 2x M6
Do not mount front or back plate yet!

4

Mount monitor or tablet on the Vesa plat and guide the cables through the column.
Refer to the manual and screws supplied with your screen for mounting instructions.


5

Slide the front panel over the side panel and mount it according to the holes with 6x M6x10




6

Slide the back panel over the side panel and mount it according to the holes with 6x M6x10
Your Chiosco stand is ready for use.

Content

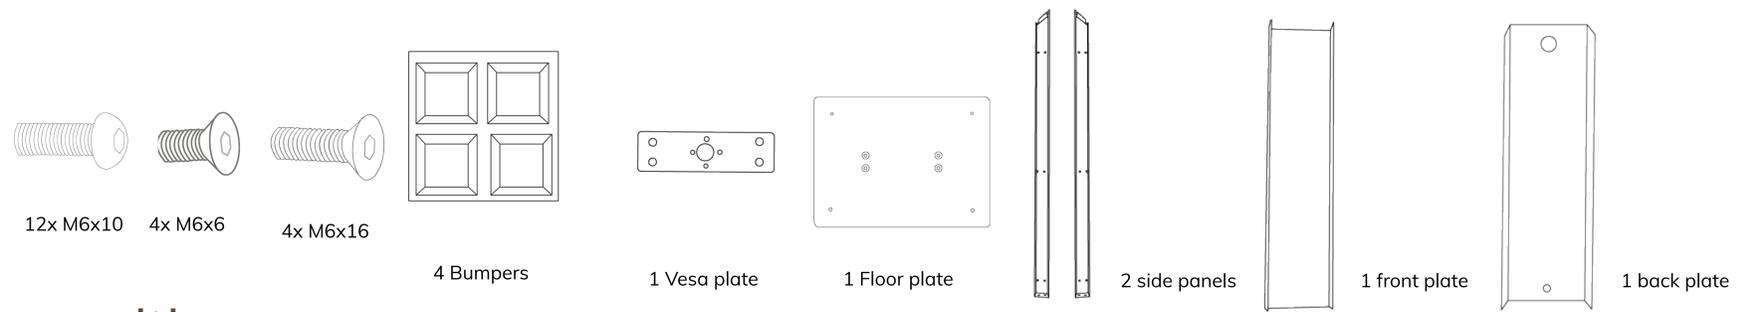

Necessities

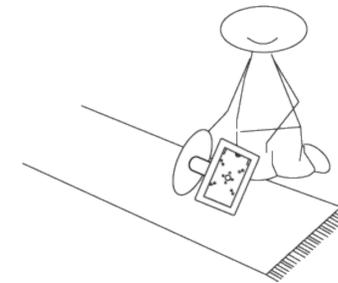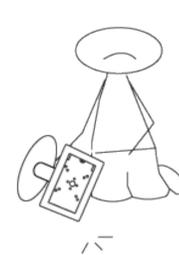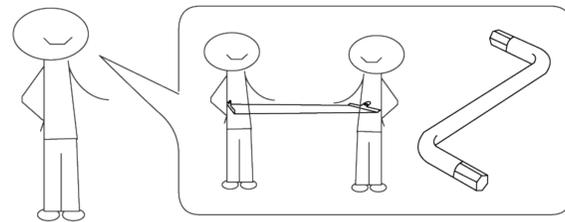

NOTE: Use a soft underlayment during assembly to avoid damage

Explanation

