


PARAPROJECT®

Case i10 Typ-C

Protect , Charge , Sync , Transport

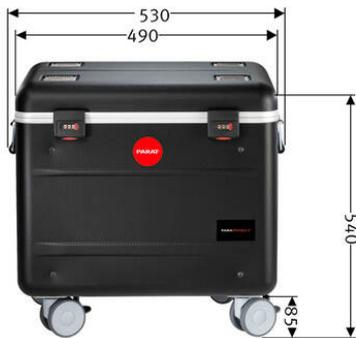

Part denomination	PARAPROJECT Case i10 Typ-C Charge & Sync, incl. USB-C® cable, black
Part number	208642151
GTIN /EAN	4006793003415
Field of application	Education
Certificates	CE
Applicable standards	DIN EN 60950-1, DIN EN 55022, DIN EN 55024
Scope of delivery	<ul style="list-style-type: none"> - 10x USB-C® cables - 1x device connecting cable 5m - 1x USB connection cable 3m - 1x Y-adapter with 1x IBM outlet and 1x Euro-8 socket - 1x Y-adapter with 1x EU flat-in plug and 1x EU-8 socket - instruction manual
Materials	- X-ABS plastic
Transport	4x smooth-running castors with Ø 75mm, two of them with wheel-locks, telescopic handle 4-part, carrying handles on both sides, fold down automatically
External dimensions (WxDxH)	530 mm x 390 mm x 540 mm
Weight	12300 g
Transport dimensions	560 mm x 410 mm x 550 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO
Fittings	<ul style="list-style-type: none"> - case lid with various compartments and zipper pocket for accessories and styluses - case body with sync and charging unit - 10 storage compartments for iPad/tablets - storage compartment for master laptop and pocket to stow away accessories such as Access Point/router and/or Apple TV - ventilation slots in the case lid and bottom for optimum air circulation - temperature sensor - programmable, internal charge-timer
Compatible devices	all devices with USB-C®
Max. number of devices	10
Operating system	iOS / Windows / Android
Cable types for equipment	USB-C®
Power supply	central power supply for all devices
Output power per port	2,4A
Optional accessories	- USB charging cable for USB-A to Lightning®

PARAPROJECT®

Case i10 Typ-C

Protect , Charge , Sync , Transport

Lock types	combination lock
Connections	- central power supply outside, USB B port for sync function, network socket (RJ45) for Access Point, optional HDMI port inside, 16x USB-A ports for Flex2Connect, Y-adapter, C14 socket to 1x IBM outlet and 1x EU-8 socket, Y-adapter, C14 socket to 1x EU flat-in plug and 1x EU-8 socket
Data of currents	- 100-240V, max. 3,6A, 50/60Hz
Dimension of pockets	29 mm x 210 mm x 310 mm
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm



- LED charging indicator



- sync and network connector