


PARAPROJECT®

Case C10

charging , transport , storage

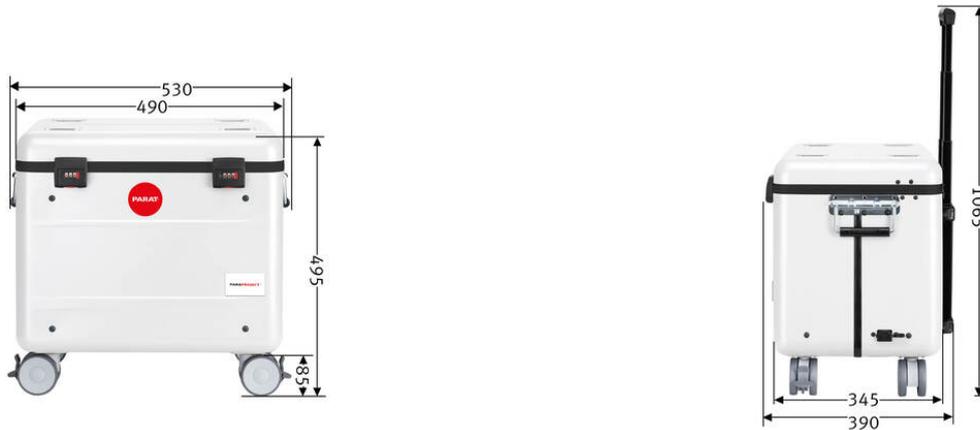

Part denomination	PARAPROJECT Case C10 Charge Only, 15.6", white
Part number	208.630-170
GTIN /EAN	4006793002326
Field of application	Education , Health Care
Certificates	CE
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55024
Scope of delivery	- 1x device connection cable EU, length: 5 m - 5x y-adapter with 2x IBM ports (C5, 3-pin) - 5x y-adapter with 2x Euro-8 sockets (C7, 2-pin) - 1x user guide for combination lock
Materials	- ABS plastic / PMMA - aluminium - Con-Pearl®
Transport	4x smooth-running wheels (with 2 lockable castors) / telescopic handle, 4-fold / carrying handles on both sides
External dimensions (WxDxH)	530 mm x 390 mm x 495 mm
Weight	10650 g
Transport dimensions	540 mm x 400 mm x 530 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1740 mm
Number of euro-pallet	6
customs tariff number	42021250
Country of origin	RO
Fittings	- case lid: napped foam - body: 10x storage compartment for chromebooks / ultrabooks up to 15.6", storage for a total of 10x original power units to charge the chromebooks / ultrabooks, separate on/off-switch for charger - additionally: air vents in the lid and bottom tray ensure optimum air circulation
Compatible devices	chromebook , ultrabook
Max. number of devices	10
Operating system	Chrome OS / macOS / Windows
Cable types for equipment	y-adapter with 2x IBM ports (C5, 2-pin) or Euro-8 socket (C7, 3-pin)
Power supply	use of customer's own power supply units
Optional accessories	- y-adapter with 2x Euro flat plugs - external weekly timer
Lock types	combination lock

PARAPROJECT®

Case C10

charging , transport , storage

Connections	- outside: - central power supply with protective cap - on/off-switch inside: - 5x IBM ports (C5, 3-pin)
Dimension of pockets	35/25 (zick-zack Anordnung der Fächer) x 255 x 350 mm
Color	white

product image similar / information without content / subject to errors and changes / all dimensions in mm



- storage compartment for power units



- central power supply with protective cap