


# PARAPROJECT®

## Case i16

charging , synchronizing , transport , storage , flex2connect

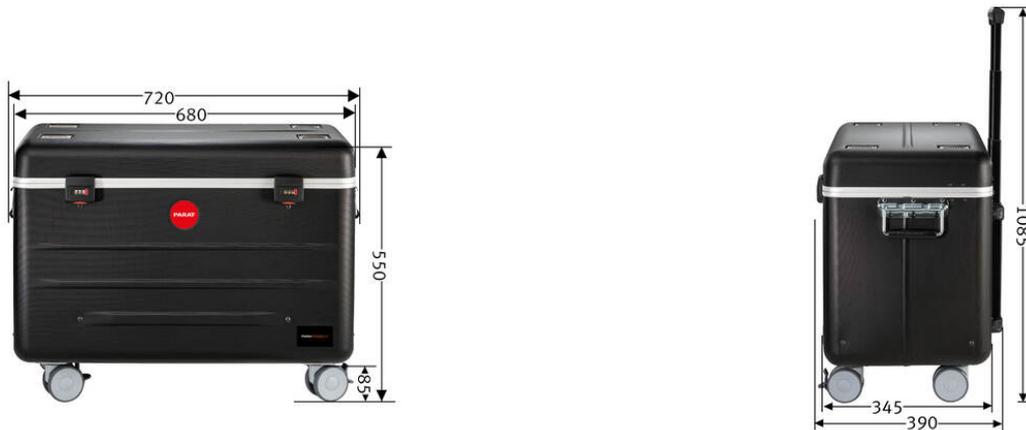

Part denomination	PARAPROJECT Case i16 Charge&Sync, incl. USB-A to Lightning® / LED cable, black
Part number	208.600-15101
GTIN /EAN	4006793000704
Field of application	Education , Health Care
Certificates	CE
Applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55024
Scope of delivery	<ul style="list-style-type: none"> <li>- 16x USB data and charging cable to lightning connector with LED display</li> <li>- 1x device connection cable EU, length: 5 m</li> <li>- 1x USB connection cable, length: 3 m</li> <li>- 1x y-adaptor with 1x IBM socket (C5, 3-pin) and 1x Euro-8 socket (C7, 2-pin)</li> <li>- 1x y-adaptor with 1x Euro flat plug (2-pin) and 1x Euro-8 socket (C7, 2-pin)</li> <li>- 1x user guide for combination lock</li> <li>- 1x user manual</li> </ul>
Materials	<ul style="list-style-type: none"> <li>- aluminium</li> <li>- Con-Pearl®</li> <li>- X-ABS plastic</li> </ul>
Transport	4x smooth-running castors (with 2 lockable castors) / telescopic handle, 4-fold / carrying handles on both sides
External dimensions (WxDxH)	720 mm x 390 mm x 550 mm
Weight	16250 g
Transport dimensions	760 mm x 420 mm x 570 mm
Dimensions of euro-pallets	1200 mm x 800 mm x 1860 mm
Number of euro-pallet	6
customs tariff number	85044083
Country of origin	RO
Fittings	<ul style="list-style-type: none"> <li>- case lid with diverse compartments and pockets</li> <li>- body: sync and charging unit, 16 pockets for iPad, storage compartment for master laptop and pockets for accessories such as access point, router and/or Apple TV</li> <li>- additionally: air vents in the lid and bottom tray ensure optimum air circulation</li> <li>- built-in programmable charging timer</li> <li>- temperature sensor (overheating protection)</li> </ul>
Compatible devices	all iPad 4G and beyond , as well as all iPad Mini
Max. number of devices	16
Operating system	iOS
Cable types for equipment	USB data and charging cable to lightning connector with LED display
Power supply	central power unit for the entire power supply of devices
Output power per port	2,4 A

# PARAPROJECT®

## Case i16

charging , synchronizing , transport , storage , flex2connect

Lock types	combination lock
Connections	- outside: - central power supply with protective cap - USB-B terminal for sync - network connector (RJ45) for access point - optional HDMI port inside: - 16x USB-A terminal for Flex2Connect -y-adaptor, C14 plug to 1 x IBM port (C5, 3-pin) and 1 x Euro-8 socket (C7, 2-pin, AUX 1) -y-adaptor, C14 plug to 1 x Euro flat plug and 1 x Euro-8 socket (C7, 2-pin, AUX 2)
Data of currents	- 100 - 240 V - max. 3,6 A - 50/60 Hz
Dimension of pockets	28 x 220 x 310 mm
Dimensions of other pockets	25 x 300 x 320 mm
Color	black

product image similar / information without content / subject to errors and changes / all dimensions in mm



- sync and Charging unit (Switch On / Off)
- built-in programmable charging timer



- central power supply with protective cap
- USB-B terminal for sync
- network connector (RJ45) for access point
- optional HDMI port